


ACCEPTED VENDORS:
FLAME ENTERPRISES
888-352-6332

MANUFACTURER:
KLIXON

OVERLOAD CYCLING: 100 CYCLES @ 200% RATING
VIBRATION: 10 G'S 50-500HZ
MECHANICAL SHOCK: 30 G'S AT 11.0 MILLISECOND DURATION
ACCELERATION: 10 G'S MINIMUM
SAND AND DUST: 12 hrs
CORROSION: SALT SPRAY 48 hrs
HUMIDITY: 10 days
EXPLOSION PROOF: WHILE INTERRUPTING RUPTURE CURRENTS

ENDURANCE: MECHANICAL - 10,000 CYCLES
120VAC - 400HZ INDUCTIVE - 5000 CYCLES
RESISTIVE - 5000 CYCLES
30VDC - INDUCTIVE - 200 CYCLES
RESISTIVE - 5000 CYCLES

DASH NO.	PART NO.	AMP RATING	MAX VOLTAGE DROP	CURRENT INTERRUPT CAPACITIY @ 120VAC, 400HZ	CURRENT INTERRUPTING CAPACITY
-1	7270-1-30	30	0.5	3500	4000

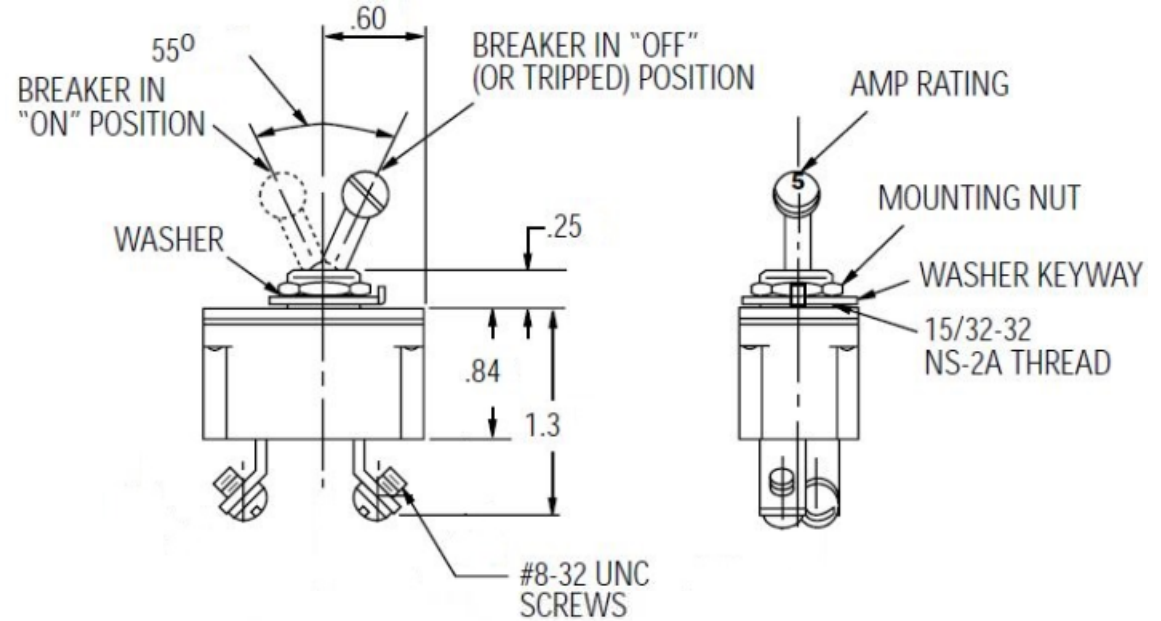

NOTES:

- THIS DRAWING DEFINES THE OVERALL GEOMETRY AND PERFORMANCE SPECIFICATIONS OF THE PART/ASSEMBLY, AND CONSTITUTES THE ACCEPTANCE CRITERIA THEREOF. ONLY THE ITEM(S) DESCRIBED IN THIS DOCUMENT PROCURED FROM THE VENDOR AND/OR MANUFACTURER LISTED HEREON ARE APPROVED FOR USE. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR APPROVAL. CONFORMANCE OF HARDWARE TO THESE REQUIREMENTS IS ACCEPTABLE IN LIEU OF VENDOR AND/OR MANUFACTURER DOCUMENTATION.

~CONFIDENTIAL INFORMATION~
THE INFORMATION AND DATA CONTAINED HEREIN IS PROPRIETARY AND IS SUBMITTED IN CONFIDENCE; AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR ANY PURPOSE WHATSOEVER WITHOUT THE PRIOR WRITTEN PERMISSION OF PARAVION TECHNOLOGY, INC.

PROTO

Paravion® Technology Inc.		TITLE CIRCUIT BREAKER SWITCH		DRAWING NUMBER ES50188		
DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED: .X = ±.1 .XX = ±.05 .XXX = ±.010 ANGLES = ± 1°		DRAWN BY EW	CHK'D BY LS	APRVD. BY JT	DATE 8/8/17	REV A
THREADS: INTERNAL CLASS 2B EXTERNAL CLASS 2A		DO NOT SCALE DRAWING ©2017 PARAVION TECH. INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY INC.		SHEET 1 OF 1		